



USB-C to Gigabit Adapter + USB Hub

TUC-ETGH3 (v1.0R)

- 1 x Gigabit Ethernet port
- 3 x USB 3.0 ports
- Windows[®] and Mac[®] compatible
- · Flexible USB-C cable accommodates most installations
- Backward compatible with USB 2.0 and 1.1 devices
- Supports Wake on LAN (Suspend Mode)


TRENDnet's USB-C to Gigabit Adapter + USB Hub, model TUC-ETGH3, adds a Gigabit Ethernet port and three 5Gbps SuperSpeed USB 3.0 ports to a Windows® or Mac® computer. Easy installation – simply plug in flash drives, printers, scanners and other USB 3.0 devices at speeds ten times faster than a USB 2.0 connection. This USB-C adapter and hub combination is also compatible with USB 2.0 and 1.1 devices.

TRENDIET




USB-C

Easily connect up to three USB 3.0 devices to a USB-C enabled desktop or notebook PC.




Gigabit Speeds

Experience full duplex 2Gbps connection speeds with this compact USB-C Gigabit adapter.



Compatibility

This USB-C adapter and hub combo is compatible with Windows[®] and Mac[®] operating systems.

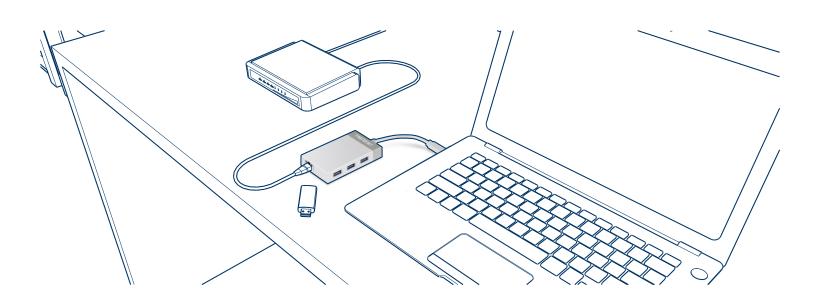



Gigabit Ethernet

Adds a Gigabit Ethernet port



Installation Flexibility

Integrated 12.7cm (5 in.) USB-C cable accommodates most installation scenarios



Backwards Compatibility

Compatible with USB 2.0 and 1.1 devices



USB-C

Easily connect up to three USB 3.0 devices to a USB-C enabled desktop or notebook PC



Operating Systems

Compatible with Windows and Mac operating systems



LED Indicators

LED indicators display link and activity



Specifications

Standards	• IEEE 802.3 • IEEE 802.3u • IEEE 802.3ab • IEEE 802.3x • IEEE 802.3az • USB Type-C • USB 3.0 • USB 2.0 • USB 1.1
Interface	1 x USB Type-C connector3 x USB 3.0 ports1 x Gigabit port
Maximum Data Rate	 Up to 2Gbps (Gigabit port) Up to 5Gbps (USB port)
Special Features	Compact form factor Energy saving GREENnet technology Flexible USB Type-C cable
USB Bus Powered	Output: 5V, 0.9A Consumption 4.5W (max.)

System Compatibility	• Windows: 10, 8.1, 8 • MacOS: 10.9 – 10.13
Operating Temperature	• 0 - 40 °C (32 - 104 °F)
Operating Humidity	Max. 90% non-condensing
Certifications	• CE • FCC
Dimensions	• 92 x 55 x 16 mm (3.6 x 2.2 x .63 in.) • 54g (1.9 oz.)
Warranty	• 2 year limited

PACKAGE CONTENTS

- TUC-ETGH3
- Quick Installation Guide
- CD-ROM (Driver & User's Guide)