

# SPC-7000

System Control Keyboard




## Key Features

- 5" TFT touch LCD
- Network Camera / SSM / Analog Camera / DVR control
- User-friendly design and easy-to-use keypad
- 3 Axis joystick to control PTZ function
- Detachable joystick / jogshuttle for universe use (Right / Left hand use)
- USB interface support (1ea for SSM, 1ea for image snapshot / Upgrade)
- Fast camera-tile mapping, Config import / export

## Dimensions

Unit : mm (inch)

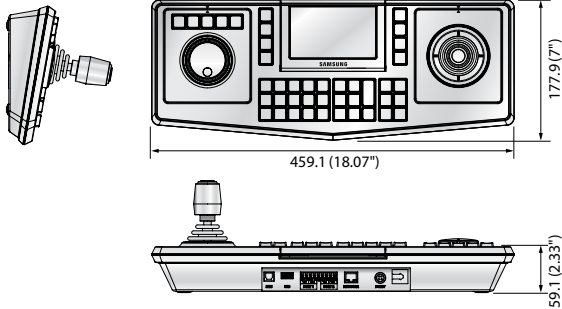

SPC-7000		
<b>COMMUNICATION</b>		
Control Equipment		Network Camera / SSM / Analog Camera / DVR
Interface		Ethernet (Network camera) USB (SSM) 1ea, USB 1ea (Upgrade, Config import/export, Image snapshot) RS-485/422 (Analog Camera, DVR) 1ea, RS-485/422 (Cascade among controllers) 1ea
Interface Protocol	Ethernet	SUNAPI
	USB	Dedicated
	RS-485/422	SRD, Pelco-D/P, Panasonic, Vicon, AD, Honeywell, Bosch, Elmo, GE, Samsung-T/E
Units to Control		Network Camera : Max. 255ea, SSM : 1ea, Analog Camera / DVR : Max. 255ea
Baud Rate (RS-485/422)		2400 ~ 57,600bps
Network Protocol		TCP, HTTP, DHCP, IPv4
<b>OPERATIONAL MECHANICAL</b>		
LCD Display		5" TFT LCD
Joystick		3 Axis twist zoom
Jog Shuttle		SSM / DVR playback control
<b>CONTROL</b>		
Camera		Pan / Tilt / Zoom, Focus, Auto focus, Preset, Group, Tour, Swing, Trace, Auto tracking, Alarm off/on, Freeze
Video Wall		Camera-tile (Channel) mapping, Layout (Display division mode) change
Recorder		Recording / Playback control, Alarm off, Menu
Device Management		Built-in device registration / Modification on LCD
User Management		Admin + 9 operators
Import / Export		Configuration import / export
<b>MISCELLANEOUS</b>		
Video Snapshot		Still image (Network camera) export using USB memory
Input		Alphabet input (Virtual keyboard)
Language		English, Spanish, French, Italian, German, Turkish, Polish, Russian, Korean, Chinese, Japanese
<b>ENVIRONMENTAL</b>		
Operating Temperature		0°C ~ 40°C (+32°F ~ +104°F)
Operating Humidity		20 ~ 85%
<b>ELECTRICAL</b>		
Input Voltage		12V DC
Power Consumption		Max. 6.4W
<b>MECHANICAL</b>		
Dimensions (WxHxD)		459.1 x 59.1 x 177.9mm (18.07" x 2.33" x 7")
Weight		1.5Kg (3.3 lb)

\* The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)

## System Configuration

